




1993-1998 Jeep Grand Cherokee ZJ Oil and Oil Filter Replacement

A video tutorial on how to change/replace the oil and oil filter on a 5.2L 1993-1998 Jeep Grand Cherokee ZJ.

Written By: eCuration

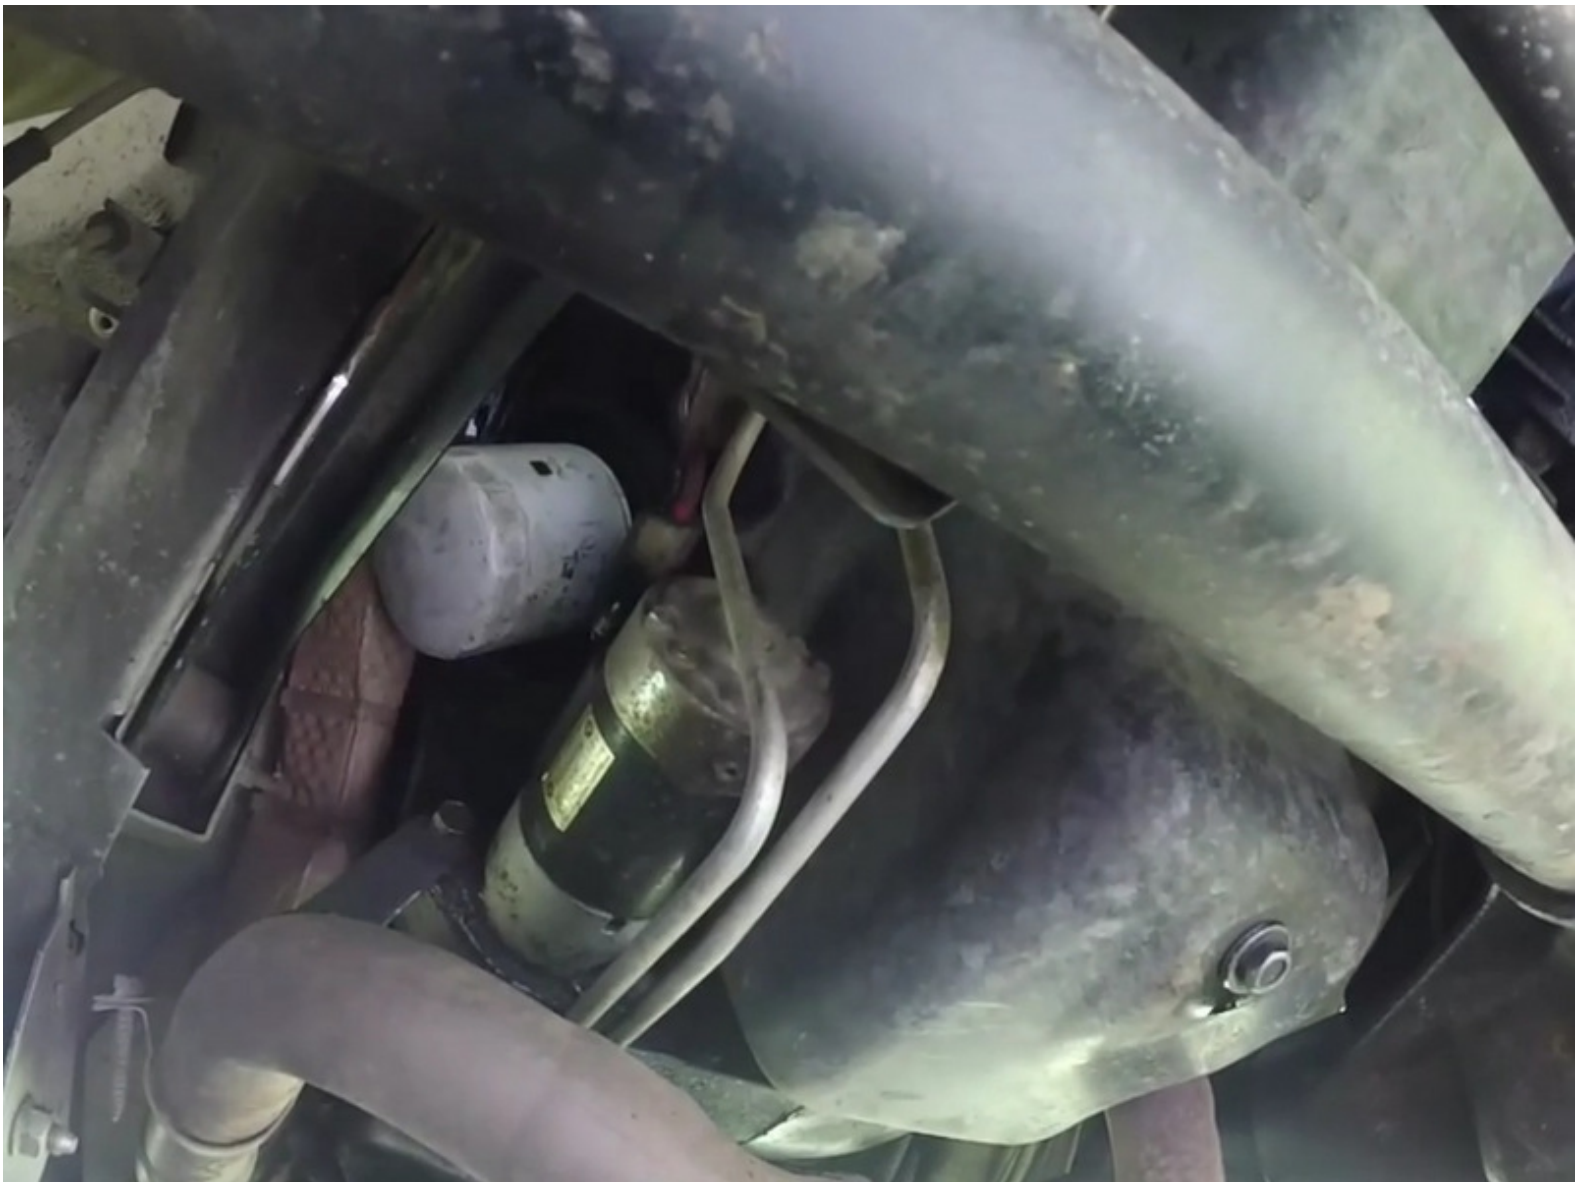

INTRODUCTION

It's a good idea to change out the oil and filter every 3-5k miles, and this video guide is a perfect how to.

[video: <https://www.youtube.com/watch?v=1ACnw7k8Qrc>]



TOOLS:

- [Oil Filter Wrench](#) (1)
- [14mm Wrench](#) (1)
- [Long Neck Funnel](#) (1)
- [Paper Towels](#) (1)
- [Oil Drain Pan](#) (1)



PARTS:

- [Oil Filter Jeep Grand Cherokee ZJ 1993-1998](#) (1)
- [Motor Oil 1qt 10W-30](#) (5)

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-16 01:54:31 PM.